

- Long filter life and high filtration efficiency on many applications
- MERV\* 10 filtration efficiency rating per ASHRAE 52.2-2007
- Enhanced performance due to a unique combination of fiber sizes and a more uniform fiber distribution indicates excellent performance
- Reduced energy requirements and lower operating costs due to low resistance to airflow
- Flame retardant media available
- Superior to felts, fabrics, cotton cloths, and similar media

\* Refer to Minimum Efficiency Reporting Value on page 2.




**Cellulex™ Cartridge**

## APPLICATIONS

- Recommended for a wide variety of applications
- Good choice for dry, coarse particulate
- Economical choice for operations with forced or cyclical filter replacement (independent of pressure drop)

## SEM† IMAGES

1 micron = 1/25,400 of an inch (1/1000 of a millimeter)

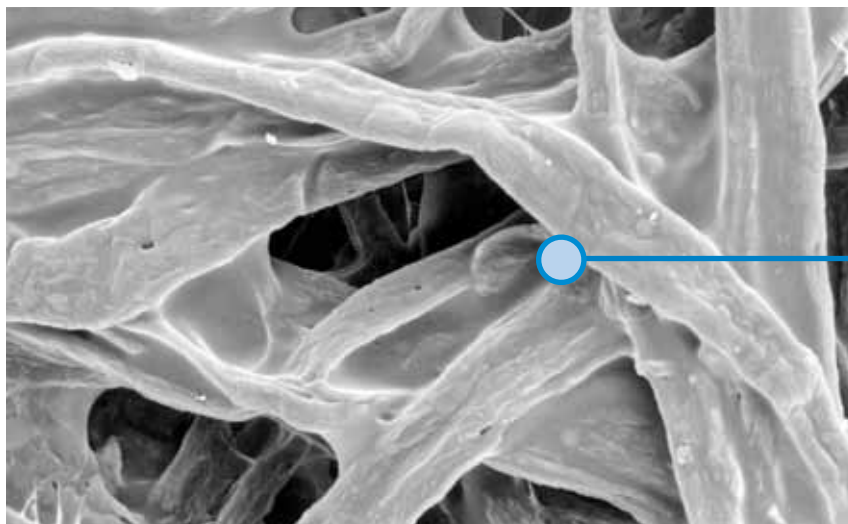

**Cellulex™ Media (600x)**

## SPECIFICATIONS

### MEDIA COMPOSITION

Substrate	Proprietary blend of cellulose fibers Flame retardant version per UL <sup>†</sup> Standard 558, TAPPI Standard T 461 cm-09
-----------	---

### CARTRIDGE CONSTRUCTION

Standard Construction	Galvanized metal end caps Galvanized expanded metal liner 72% open area Urethane gasket
Options	Optional stainless steel liner and end caps

### MEDIA EFFICIENCY

U.S. Efficiency Rating	MERV* 10 per ASHRAE 52.2-2007
------------------------	-------------------------------

### MEDIA COMPATIBILITY DATA

Temperature Resistance	180°F 82°C	
Moisture Absorption**	Maximum 14% @ 70°F (21°C) and 65% RH	
Chemical Tolerance***	Acids→Poor Bases→Fair	Oxidants→Poor Solvents→Fair
Abrasion Resistance	Good per TAPPI 476 (Taber Method)	

## CURRENT AVAILABLE CONFIGURATIONS

Collector Models	Filter Area		Dimensions		Cellulex		
	ft <sup>2</sup>	m <sup>2</sup>	in	mm	Standard	FR	NL
AerBooth	226	21.0	12.74 x 26	323.6 x 660.4	•	•	•
AT-3000	212	19.7	13.84 x 22	351.5 x 558.8		•	
Bin Vent (TBV)	226	21.0	12.74 x 26	323.6 x 660.4	•	•	•
CX Series	254	23.6	13.84 x 26	351.5 x 660.4	•	•	
Downdraft Bench	254	23.6	13.84 x 26	351.5 x 660.4	•	•	
Downflo® (DF)	226	21.0	12.74 x 26	323.6 x 660.4	•	•	•
Downflo II (DFT)	254	23.6	13.84 x 26	351.5 x 660.4	•	•	•
Downflo (SDF)	103	9.6	9.21 x 22.3	233.9 x 566.2	•		
Environmental Control Booth™ (ECB)	226	21.0	12.74 x 26	323.6 x 660.4	•	•	•
MTD	226	21.0	12.74 x 26	323.6 x 660.4	•	•	•
ProBooth™	226	21.0	12.74 x 26	323.6 x 660.4	•	•	•
ShopPro™	65	6.0	16.6 x 10.1	421.6 x 256.5	•		
	135	12.5	16.6 x 20.1	421.6 x 510.5	•		
	177	16.4	16.6 x 26.1	421.6 x 662.9	•		
TD Large	226	21.0	12.74 x 26	323.6 x 660.4	•	•	•
TD Small	60	5.6	7.9 x 16	200.7 x 406.4	•		

† UL is a registered trademark of Underwriters Laboratories, Inc.

\* The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (2007) test standards. The MERV rating was determined at a face velocity of 118 feet per minute (36.0 meters per minute) and loading up to four inches (101.6 millimeters) water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

\*\* Environmental conditions involving combinations of high temperature, corrosive material, and moisture can reduce media strength. Reduction in media strength may compromise cartridge integrity and performance.

\*\*\* A combination of chemicals may alter fiber resistance to the specified performance level. Chemical attack may compromise cartridge integrity and performance.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. **Call Donaldson Torit today 800-365-1331.**



**Donaldson**  
FILTRATION SOLUTIONS

Tel 800-365-1331 (USA)  
Tel 800-343-3639 (within Mexico)

donaldsontorit@donaldson.com  
donaldsontorit.com

Donaldson Company, Inc.  
Torit  
P.O. Box 1299  
Minneapolis, MN  
55440-1299 U.S.A.

**EXACTLY WHAT YOU NEED.™**

**Cellulex Cartridge (09/12)**

© 1995 Donaldson Co., Inc. All Rights Reserved. All products, product specifications, and data (airflow, capacity, dimensions, or availability) are subject to change without notice, and may vary by region or country. Donaldson Torit is a registered trademark of Donaldson Company, Inc. Contains Donaldson proprietary technology.