



- Specially designed for applications using straight oils, mineral oils, water-soluble, as well as synthetic and semi-synthetic coolants
- Combination of two proprietary filtration media removes oil and coolant mists from wet machining operations
- Proprietary blend of synthetic fibers reduces pressure drop and increases airflow
- Outer wrap allows the filter cartridge to drain and prevents the collected liquid from entering the clean airstream
- Variety of filter sizes and airflow capacities available
- Maximum operating temperature is 150°F (65°C)

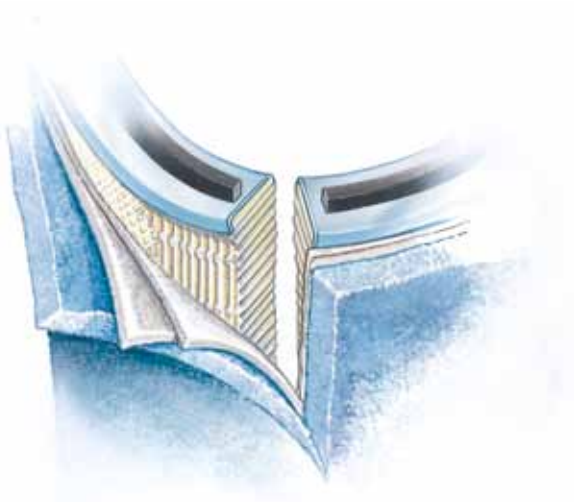

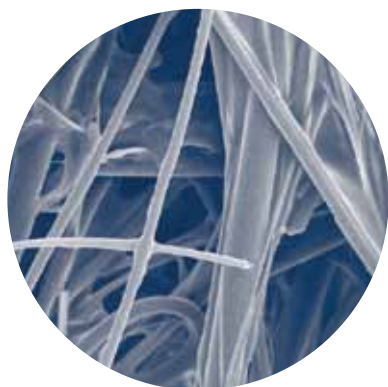

600x

Dryflo® filter media is made from proprietary synthetic media incorporating both small and large fibers for optimum filtration. The smaller fibers provide increased filtration efficiency; after mist is captured and coalesced, the larger fibers allow the oil to drain from the filter. The media also incorporates a proprietary corrugation method which maintains uniform airflow and lower pressure while the media is saturated with oil.

## SPECIFICATIONS

MEDIA COMPOSITION		CARTRIDGE CONSTRUCTION	
Substrate	Synthetic	Standard Construction	Galvanized end caps/liners Urethane gasket

## CONFIGURATIONS

Collector Models	Filtration Area		Cartridge Dimensions	
	ft <sup>2</sup>	m <sup>2</sup>	in	mm
ADMC-AD6-AD10	220	20.4	22.4 x 25	569.0 x 635.0
DMC-MMA	41	3.8	10.86 x 8.1	275.8 x 205.7
DMC-MMB	82	7.6	16.42 x 12	417.1 x 304.8
DMC-B	82	7.6	16.42 x 12	417.1 x 304.8
DMC-C	140	13.0	18.92 x 20	480.6 x 508.8
DMC-D1-D10	220	20.4	22.4 x 25	569.0 x 635.0

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. **Call Donaldson Torit today 800-365-1331.**



Tel 800-365-1331 (USA)  
Tel 800-343-3639 (within Mexico)

donaldsontorit@donaldson.com  
donaldsontorit.com

Donaldson Company, Inc.  
Torit  
P.O. Box 1299  
Minneapolis, MN  
55440-1299 U.S.A.

**EXACTLY WHAT YOU NEED.™**

**Dryflo Cartridge (11/12)**  
© 2007 Donaldson Co., Inc. All Rights Reserved. All products, product specifications, and data (airflow, capacity, dimensions, or availability) are subject to change without notice, and may vary by region or country. Donaldson Torit and Dryflo are registered trademarks of Donaldson Company, Inc. Contains Donaldson proprietary technology.